



**MOLYTEC**

AUSTRALIA

# PRODUCT CATALOGUE

ISSUE #8

Australian Leader in Industrial and Automotive Lubricants Since 1986  
[www.molytec.com.au](http://www.molytec.com.au)



**TERMS AND CONDITIONS OF USE:**

The information contained within this catalogue and the functions offered are intended to provide information about products available for purchase from Molytec. All reasonable efforts have been made to ensure the accuracy of the information. However, Molytec cannot be held responsible for any errors or unexpected unfulfillment of shipments. Molytec does not warrant the accuracy and reserves the right to make changes to the catalogue and its functions at any time without notice.

Except where otherwise noted or superseded by process of law, Molytec accepts no responsibility or liability for any losses or damages of any kind arising out of the use of this online catalogue or any of its related functions.

This catalogue is offered on the basis of the terms and conditions stated herein. Use of this catalogue confirms the users acceptance of these same terms and conditions. Such acceptance allows full access to view the catalogue and utilize its functions.

© Copyright Molytec 2023





# CONTENTS

---

- |  |  |
|--|--|
| <b>03</b> Contact Molytec                | <b>21</b> Ultraloc Information             |
| <b>04</b> Cobra Cote Collection          | <b>23</b> Ultraloc FAQs                    |
| <b>08</b> Aerosols Lubricants            | <b>24</b> Ultraloc Reference Chart         |
| <b>09</b> Aerosols Cleaners              | <b>26</b> Threadlockers                    |
| <b>10</b> Aerosols Workshop              | <b>28</b> Retaining Compounds              |
| <b>11</b> Silicone                       | <b>29</b> Instant Adhesives                |
| <b>12</b> Aerosols Zinc / Silvagal       | <b>30</b> XS Sealants                      |
| <b>13</b> Aerosols DCM                   | <b>31</b> Sealants / RTV's                 |
| <b>14</b> Nickeltec                      | <b>32</b> Activators / Epoxies             |
| <b>16</b> Copatec                        | <b>33</b> Supatape                         |
| <b>17</b> Foodtec / Molypaste            | <b>34</b> Original Superglue /<br>Pro Seal |
| <b>18</b> Molycut /<br>Red Rubber Grease | <b>35</b> Pro Seal / SANVO                 |
| <b>19</b> Grease                         | <b>36</b> Molytec Information              |
| <b>20</b> Fleece Grease                  |  |

# CONTACT US

---



**WESTATE HOSE SUPPLIES**  
A.B.N. 36 073 957 517  
[www.westatehose.com.au](http://www.westatehose.com.au)

**WELSHPOOL** Phone: (08) 6163 3626 Email: [sales@westatehose.com.au](mailto:sales@westatehose.com.au)

**O'Connor** Phone: (08) 9314 1833 Email: [oconnor@westatehose.com.au](mailto:oconnor@westatehose.com.au)

INDUSTRIAL HOSES AND FITTINGS

# COBRA COTE

Visit the  
Cobra Cote Website  
[www.cobracote.com.au](http://www.cobracote.com.au)



## COBRA COTE Vinyl Protectant

The perfect vinyl protector for cars, trucks, buses, boats and bikes. Available in several fantastic fragrances, Cobra-Cote's anti-static formulation helps stop dirt and dust buildup and renews lustre, without leaving surfaces greasy or smudged. As well as your original favourites, great new fragrances are now available!

250g CHERRY	- M811
250g APPLE	- M812
250g OCEAN BREEZE	- M879
250g MUSK	- M839
250g BLACK AQUA	- M851
250g VANILLA	- M852
250g CANADIAN PINE	- M869

## Cobra Cologne Aero Air Freshener + Cobra Cologne Hanging Air Freshener

Formulated to produce a long lasting, refreshing fragrance that neutralises unpleasant odours in and around cars, boats, trucks and homes. Leaving a pleasant, fresh smell that is made to last, Cobra Cologne is available in two great scents. Both can be used in conjunction with each other, and with the original Cobra Cote - The Cockpit Protector - both as a handy aerosol, or convenient hanging Cobra.



### Aero Air Freshener

VANILLA 125g Aerosol	- M606
BLACK AQUA 125g Aerosol	- M607

### Hanging Air Freshener

CHERRY	- M620
APPLE	- M621
VANILLA	- M622
MUSK	- M623
MINT	- M624
PEACH	- M625
BLACK AQUA	- M626
OCEAN BREEZE	- M627
COOL COLOGNE	- M628
FOREST	- M629
(24 per carton)	





## Cobra Cote Wash n' Shine

A pH neutral, non caustic Wash n Shine that offers biodegradability. Contains high foaming surface active agents and emulsifiers to thoroughly and rapidly clean all surfaces. A highly efficient streak free cleaner that will remove dirt and oil. Meets all cleaning and maintenance requirements on all hard surfaces. Won't harm paintwork and has a high dilution rate making it a very economical solution.

1L - M610 5L - M611 20L - M612



## Cobra Cote Top Shine

Cobra Cote Top Shine is a leading polish for all painted, metal, aluminium, brass, copper, stainless, chrome, fibreglass, and plastic surfaces. Specifically formulated using the finest polishing and coating technology. Designed to achieve protection against U.V. radiation & road tar. Provides a long lasting shine and has an easy on - easy off formulation.

500ml - M615



## Cobra Cote Foaming Tyre Cleaner

Little effort to achieve clean and shining tyres with Cobra Cote Foaming Tyre Cleaner. The fast-acting formula lifts grime and dirt from the tyre and carries it away leaving behind a lustrous shine. Cobra Cote Foaming Tyre Cleaner protects against the elements that can crack and fade sidewalls without harming wheels or wheel covers.

450g - M608



## Cobra Cote Glass Cleaner

An easy-to use, industrial strength formulation that leaves glass and stainless steel surfaces clean and sparkling. Streak Free.

750ml - M660  
5L - M661  
20L - M662



## Cobra Cote Spray n' Clean

An all-purpose, ready-to-use, all surface cleaner that also kills bacteria. For use in your kitchen, bathroom, toilet, eating areas, etc. Suitable for wood, plastic, vinyl, leather, fibreglass, stainless steel, chrome, aluminium, steel, all painted surfaces, ceramics, tiles, basins, fabrics etc.

750ml - M670  
5L - M671  
20L - M672



## Cobra Cote Diamond Cote

An easy-to-use, protective coating ideal for chrome, stainless steel, vinyl, rubber, plastic, gel coat and many other surfaces.

750ml - M680

**NEW  
PRODUCTS**

# KING COBRA COTE

## 'KING' COBRA COTE VINYL PROTECTANT

---

A HUGE 350g can is now available to order from Molytec. Still the best product on the market. Cobra Cote is the perfect leather / vinyl protector for trucks, cars, buses, boats and bikes. Cobra Cote's anti-static formulation helps stop dirt and dust build up and renews lustre without leaving surfaces greasy or smudged.

- 12 per carton

350g BLACK AQUA - M651

---





# NEW COBRA COTE SCENTS

## Organic *Air* Freshener



LASTS  
**60**  
DAYS!



FOR VEHICLES



FOR HOME



FOR OFFICE



### COBRA COTE CAR SCENTS BOXES OF 12 ONLY

Keep your vehicle, office and home smelling amazing with a Cobra Cote Scents Organic Air Freshener. These organic air fresheners are made from blended natural and synthetic fibers treated with oil to ensure a long lasting smell (up to 60 days). The removable lid features an adjustable vent that controls the level of scent, putting you back in control of how strong you want the smell to be.

#### Features:

- Natural and organic fiber air freshener, fragranced with high-quality scented oils
- Removable vented lid, with fragrance control action that lets you adjust the scent level to your liking
- Capable of lasting up to 60 days.

BLACK AQUA | CHERRY | VANILLA | NEW CAR  
42g - DC6000





## Slip Slide & Glide

A dry film lubricant with resin-bonded PTFE that provides a thin film of fast-drying film of lubrication. Molytec's Slip Slide & Glide provides lubrication for life in many cases. It inhibits corrosion, resists contamination and does not wash away with water. It leaves a non-staining thin film that prevents sticking, reducing wear & friction.

200g Aerosol - M841



## Multilube

Molytec's Multilube is a multi purpose lubricant that sprays on as a liquid which then sets to a tacky grease. Multilube is designed to penetrate into those hard to lubricate places. Ideally suited on boat trailers, chains, cables, garage doors, farm and marine equipment.

350g Aerosol - M834



## Chain & Cable Lube

A non - fling, water resistant, extreme pressure lubricant for protection on chains, linkages, cables, wire ropes, sprockets, open gears, hoists, conveyors, fork lifts, tractors, farm equipment and is highly recommended in marine and mining environments.

350g Aerosol - M836



## White Spray Grease

Specially formulated aluminium complex food grade grease designed to give lubrication and protection. It is water resistant and contains rust and oxidation inhibitors.

350g Aerosol - M854



## ADF (Air Drying Film)

Molytec's air drying film is pure molybdenum disulphide in an air-drying bonding resin. This fast drying lubricant withstands high loads, provides corrosion protection and with its easy application, ADF is well qualified to coat surfaces where oils and grease cannot be used.

350g Aerosol - M800





## Brake & Parts Cleaner

### Non-chlorinated.

A blend of solvents which will safely remove grease, oil and brake fluid from brake drums & linings. Molytec Non - Chlorinated Brake & Parts Cleaner can safely be used in situations where chlorinated solvents may cause issues.

350g Aerosol - M907



## Heavy Duty Degreaser

Molytec Heavy Duty Degreaser is a concentrated, solvent-based spray-on and hose-off degreaser formulated to dissolve baked-on oil, dirt, dust and grime, leaving a revitalised surface.

400g Aerosol - M909



## Contact Cleaner

A fast drying, non - corrosive, non - staining cleaning solvent that evaporates completely. Ideal for removing contaminants from sensitive electrical and electronic parts. Safe on most plastics. Molytec Contact Cleaner is lubricant free and leaves no residue. Ideal for cleaning: Circuit Breakers, Printed Circuit Boards, Relays, Switches, Connectors, Terminal Plugs & Jacks

300g Aerosol - M866



## Glass Cleaner

The perfect streak free, fast acting industrial strength Glass Cleaner that is easy to use, simply spray on and wipe off, Also suitable for use on mirrors, chrome and stainless steel. Molytec Glass Cleaner quickly removes smudges and smoke build up.

500g Aerosol - M809

## Brake Clean

Molytec Brake & Parts Cleaner is a blend of solvents which safely remove grease, oil and brake fluid from brake drums & linings.

20L - M906

## Acetone

Molytec Acetone is a universal thinner and cleaning agent. Which is fast evaporating, non-corrosive and leaves no residue.

20L - M925



## Liquid Spanner

A high strength, heavy-duty penetrating and releasing fluid for use on heavily corroded nuts, bolts and machinery parts. Liquid Spanner works quickly to penetrate and loosen assemblies that are contaminated with rust, tar, grease and carbon deposits.

400g Aerosol - M890



## Supa Squirt

Supa Squirt is a powerful water dispersing, lubricating and penetrating fluid containing P.T.F.E. Protects machinery, toys, guns, fishing tackle etc. Disperses water, lubricates and loosens nuts, bolts and more.

400g Aerosol - M830



## UMP

Molytec UMP is a universal metal protector - soft cote. It provides a premium heavy-duty waxy film for long term protection. Seals from moisture and corrosive contaminants. Highly Resistant to chemicals, salt water, humidity and corrosive environments. Easily washes off, can be removed with Brake & Parts Cleaner (see pg. 7) Will not effect painted surfaces, rubbers, plastics and insulation materials. Temp range -20c to +100c.

300g Aerosol - M910



## Aero Spark

Aero Spark is a unique blend of chemicals that contains 25% ether to assist in starting petrol or diesel engines, even in the most difficult weather conditions. It helps to reduce excessive battery drain, and contains an upper cylinder lubricant and corrosion inhibitor.

350g Aerosol - M893



## Chrome Cote

Chrome Cote is a high quality paint formulated to provide a brilliant, chrome-like finish that is durable for both interior and exterior surfaces. Suitable for use on cars, trucks, bikes, furniture etc.

258g Aerosol - M878



## Industrial Pressure Sprayer 1L

Molytec Australia is now stocking the German made Industrial Pressure Sprayer. Highly recommended for hydrocarbon based harsh chemicals such as brake & clutch cleaners, tyre shine, degreasers, xylon, diesel & turpentine. 900ml liquid capacity, higher grade green FKM seals, polyamid body – HDPE bottle, adjustable full cone nozzle, 3 Bar / 45 PSI working pressure, safety pressure release valve, ergonomic design. 1L - 03040729





## Silicone Lubricant

Molytec Silicone lubricant is a high performance, silicone based, translucent non-toxic paste developed for use as a lubricant and protectant for rubber and metal. It is non-conductive, water resistant and protects against corrosion. Molytec Silicone Lubricant does not swell or soften rubber. Molytec Silicone lubricant also has dielectric properties.

- 25g Tube - M897
- 100g Tube - M813
- 500g Tub - M814
- 2kg Pail - M815



## Spraysafe Silicone

Spraysafe Silicone is a high quality food grade silicone fluid in an aerosol form. It is a colourless, odorless protective lubricant. Spraysafe is non conductive and is water resistant. Will not effect plastics or polycarbonates.

- 250g Aerosol - M808





## Zinc Cote

Zinc Cote galvanising spray is a high quality, zinc rich coating that contains 93% ultra pure zinc dust by weight in the dried film. This bonds to clean iron or steel surfaces to provide maximum protection against corrosion and rust creepage. A weld-through primer that can be powder coated, Molytec Zinc Cote is suitable for a variety of applications in automotive, marine, industrial, steel and mining industries.

450g Aerosol - M817



## Silvagal Cote

Silvagal Cote is an industrial strength, anti-corrosive bright silver coating for use on hot dipped galvanised steel products. Molytec Silvagal Cote gives a tough and durable finish with the appearance of newly dipped galvanised steel.

400g Aerosol - M892



## Molytec Aerosol Trigger

Molytec Aerosol Trigger enables more control for a smooth, professional finish. Includes a 4-finger trigger to minimise fatigue. Features include:

- Ergonomic trigger handle that can be attached to any aerosol can
- Soft touch trigger reduces finger fatigue, ideal for large projects
- Durable construction for repetitive use
- Provides greater spray comfort and control
- Suits standard aerosol 30mm top rim.

Part No - TR100



## Weld Anti-Spatter

Molytec Weld Anti-Spatter is a heavy-duty water based anti-spatter liquid which provides instant shielding against welding spatter. Exceptional performance, biodegradable product that significantly reduces or eliminates spatter adhesion on weld nozzles, work pieces and tooling. Does not contain no chlorinated solvents or silicones and is non-toxic, non-flammable and will not create porosity or pinholes in welds.

Solvent-free formula which reduces fume formation, is silicone free, easy to clean and paintable, and prevents corrosion, the water soluble formula is economical to use and is non-toxic, non-flammable and eliminates risk of flash during welding. Prevents weld spatter from sticking even after prolonged welds.

750ml - M920 5L - M921 20L - M922





## Quick Zinc

Quick Zinc is an aerosol Zinc-enriched primer that enables a fast drying, anti corrosive coating to be applied to metal surfaces. This provides a protective & durable coating for all types of metal including galvanised pipe, fencing, roofing, wrought iron, gates etc. It's also suitable as a weld through primer and can be powder coated when dry. Quick Zinc uses a 99% purity zinc dust, and the dry film contains 83% zinc.

360g Aerosol - D1001



## Silva n' Zinc

Silva n Zinc is a fast drying, industrial strength 100% epoxy coating designed to protect steel against corrosion, at the same time giving a gloss silver appearance to the painted surface. Silva n Zinc gives corrosion resistance via both barrier protections and sacrificial protection via a presence of zinc. Silva n Zinc uses a 99% purity zinc dust. Silva n Zinc is ideal to touch up and coat hot dipped gal structures and is suitable for use on all types of substrates.

400g Aerosol - D1005



## Black n' Zinc

DCM Black n Zinc is a industrial strength, fast drying black coating to provide greater protection against rust and corrosion, and provides a long lasting top coat finish. Black n Zinc is suitable for use in workshops, garages, metal fabrication and welding and any industrial structure that need protection from the elements.

400g Aerosol - D1006



# NICKELTEC ANTI-SEIZE

---





## Nickeltec Anti-Seize

Molytec Nickeltec Anti-Seize is a nickel based anti-seize compound. Developed to protect metal parts from corrosion, galling and seizing. Nickeltec eases assembly & disassembly of slip fit and threaded joints. Formulated for severe environments, these products protect against high temperatures up to 1450c.

DOES NOT CONTAIN GRAPHITE.

## Features & Benefits:

### High Temp Resistance

Formulated with high quality grease and solid lubricating agents for optimal temperature resistance up to 1450c.

### Seals Against Corrosion

Displaces and seals against contact with moisture and other corrosive liquids.

### Reduces Friction & Wear

Reduces metal-to-metal contact resulting in less friction & wear.

### Extreme Chemical Resistance

Perfect for applications in chemical plants, oil refineries and water / sewage plants.

### Packaging

7 different sizes available, tub, brush top tin, tubes, pail and aerosol.

## Uses:

- General purpose machine and bolt assembly
- Nuts, bolts and studs
- Stainless steel applications
- Copper free environments
- Pumps and valves
- Marine applications
- Excellent in harsh chemical environments
- Flanges, extruders and dies
- Steam turbines

25g Pod (pack of 6) - **M902**

65g Tube - **M901**

225g Brush Top Tin - **M831**

225g Tube - **M891**

450g Brush Top Tin - **M825**

2kg Pail - **M826**

300g Aerosol - **M868**



# COPATEC ANTI-SEIZE

## Copatec Anti-Seize

Molytec Copatec Anti-Seize is a copper based anti-seize compound. Developed to protect metal parts from corrosion, galling and seizing.

Ideal for corrosive environments and extreme temperature conditions. Contains anti-oxidants, anti-corrosion inhibitors, copper and metallic particles in a bentone base.

Resistant to Acid, Alkali, Seawater, Water and Steam. Remains effective at surface temperatures up to 1100c.

## Uses:

- General purpose machine and bolt assembly
- Nuts, bolts and studs
- Pumps & valves
- Battery terminals
- Excellent in harsh chemical environments
- Flanges, extruders and dies
- Steam turbines
- Pipe Threads
- Gaskets
- Disc brake anti-squeal

25g pod (pack of 6) - M903

65g tube - M900

250g brush top tin - M804

250g tube - M895

500g brush top tin - M805

2.5kg pail - M806

300g aerosol - M867







FEATURE

## Foodtec Anti-Seize

Foodtec anti-seize is a premium quality anti-seize compound developed specifically for use in applications where incidental food contact is possible. This aluminium complex based anti-seize is composed entirely of ingredients that meet Australian Quarantine Inspection Service, NSF/FDA requirements and protects metal parts from seizure, galling, rust, corrosion and heat freeze by tenaciously adhering to the metal surface. Halal Approval No: H-1.

### Uses:

- Prevents rust, corrosion, galling and heat freeze
- Temps from -50c up to 400c • Contains no metals
- Water resistant • 450g Brush Top Can
- Odorless and Tasteless • Reduces Torque

### Applications:

Lubricating and protecting parts in food processing plants, packaging plants & breweries. Applications such as stainless steel, pipe fittings, worm gears, valve assemblies, nuts, bolts & screws.

450g Brush Top Tin - **M953** 65g Tube - **M951** 200g Tube - **M952**



## Molypaste Anti-Gall

Molytec Molypaste Anti-Gall is a molybdenum disulphide and nickel based stainless thread lubricant. Molytec Molypaste is an anti-galling paste and anti-seize compound that provides a low friction coating to prevent galling and heat freeze. Containing rust and corrosion inhibitors, it does not contain graphite, copper or lead. Ideal for use on stainless steel fasteners flange / pump bolts and metal fittings.

65g Tube - **M819** 250g Brush Top Tin - **M801**



# MOLYCUT / RED RUBBER GREASE

MOLYCUT



**COMPOUND**  
400g Tub - **M400**  
2kg - **M401** & 65g Tube - **M402**



**FLUID**  
250ml Bottle - **M410**  
1L bottle - **M412**



**SPRAY**  
400g Aerosol - **M420**

**MOLYCUT** is a range of high-performance lubricants designed for severe metal working operations such as drilling, reaming and tapping. They are highly concentrated mixtures of lubricity and reactive extreme-pressure and anti-wear additives. All of the products in the range provide excellent surface finish to components and protect tooling from wear and damage.

They are suitable for most drilling, reaming and tapping (spiral point, spiral flute and fluteless) operations on most metals. For maximum flexibility of use and to accommodate individual preference the products available are:

**METAL CUTTING COMPOUND** - A soft paste compound suitable for brush or dip application

**METAL CUTTING FLUID** - A medium viscosity fluid suitable for manual application or automatic lubricator systems

**METAL CUTTING SPRAY** - A convenient aerosol form of METAL CUTTING FLUID

It is advised that compatibility is checked prior to use as the sulphurised, extreme-pressure additives may interact with some metals.

## Features:

- Excellent extreme pressure and anti-wear performance
- Maximises tool life in arduous operations
- Available in liquid, paste and aerosol form

## Instructions:

To obtain optimum performance METAL CUTTING COMPOUND, METAL CUTTING FLUID & METAL CUTTING SPRAY should be used as supplied. Apply either directly to the tool (while stationary) or to the hole to be tapped. Do not apply to rotating tooling.



## Red Rubber Grease

**MOLYTEC RED RUBBER GREASE** is a premium quality clay thickened grease formulated with castor oil. Molytec Red Rubber Grease provides outstanding performance in a wide range of applications where contact with rubber compounds is likely or required. Molytec Red Rubber Grease is recommended as a general purpose grease. This grease is compatible for automotive and industrial components for natural or synthetic rubber.

- Protects against rust & corrosion
- Excellent lubricity
- Compatible with natural & synthetic rubber
- Clay based

500g Tub - **M970** 60g Tube - **M971** 200g Tube - **M972**



## Marine Grease

Molytec Marine Grease is a No 2 NLGI lithium complex, high load carrying and superior water resistant multi-purpose grease. This product is recommended for marine trailer and other bearings that are prone to water contamination.

450g tub - **M874**  
450g cartridge - **M875**  
2.5kg pail - **M876**  
20kg drum - **M877**



## Food Machinery Grease (FMG)

A premium Aluminium Complex NLGI No 2 grease that is pure white, odourless and tasteless. Provides protection against rust and resists oxidation. Suitable for use at temperatures from - 25 C to 190 C. HALAL H1. FOOD GRADE APPROVED.

450g cartridge - **M803**  
20kg drum - **M853**



## Moly-tac II Grease

Molytac 2 Grease is a high quality, multi-purpose, extreme pressure, water resistant No 2 NLGI grade grease containing 3% molybdenum disulphide. This lithium complex grease is ideal for CV joints, and has many automotive, mining and industrial bearing applications.

450g cartridge **M820**  
2.5kg pail - **M824**  
20kg drum - **M828**



## Truck & Farm Grease

Truck & Farm Grease is a No 2 NLGI lithium complex based grease designed to give lubrication for normal to severe conditions. It is suitable for use in wheel bearings on vehicles fitted with disc brakes, where high temperatures cause ordinary greases to soften and give ineffective lubrication.

450g cartridge - **M870**  
450g tub - **M871**  
2.5kg pail - **M872**  
20kg drum - **M873**



# FLEECE GREASE



## Features & Benefits:

A unique blend of lanolin formulated for it's benefits of an environmentally friendly, non toxic film that works as a water displacing, lubricating , penetrating, and protective fluid for a wide range of multi-purpose applications.

## Uses:

- Penetrates
- Protects
- Lubricates

Machinery - Cars - Boats - Chains - Cables - Hand Tools - Seized Bolts - Rusted Metal Parts - Firearms - Moving Parts and Components

- Displaces
- Repels

Distributors - Outboard Motors - Wet Ignitions - Electrical Equipment



## Fleece Grease Gold

Extra strength lubricant for heavy duty applications, contains more waxes making for more water resistance and leaves a thicker film. Excellent anti-corrosive protectant and lubricant. NON TOXIC TYPE "C" LUBRICANT - FOOD GRADE APPROVAL CATEGORY "12".

750ml trigger - M847  
5L - M848  
20L - M849



## Fleece Grease Aerosol

Aerosol form Fleece Grease dries to a fine film. Water displacer, penetrator and lubricant. Provides lanolins famous corrosion protection. For use on ferrous and non-ferrous materials and many other surfaces.

350g Aerosol - M855



## Fleece Grease LGX

Molytec Fleece Grease LGX is a thick, tacky, lanolin grease with high load capabilities. Highly water resistant, an excellent anti-corrosive, thread anti-seize and general lubricant. FOOD GRADE APPROVED CATEGORY "10" - TYPE "A" LUBRICANT.

250g tub - M842  
1L tub - M843  
4L tub - M844  
20L tub - M845



## THE RIGHT DECISION

For every Industrial maintenance, repair and overhaul challenge Ultraloc has the right solution. Designed to prevent common failures, extend equipment life and increase production reliability. The Ultraloc range is a maintenance professionals most reliable tool.

Covering the following requirements:

### Threadlocking

The most reliable method to lock and seal threaded fasteners. From easy removal small threads under 6mm to permanent high strength over 25mm, Ultraloc brand thread lockers are available in varying viscosities and strengths for virtually any application.

- Prevents loosening of fasteners • Seals against corrosion
- Provides correct lubricity • Controlled strengths
- Suitable for all fastener sizes • Easy to apply

### Retaining

Anaerobic retaining compounds fill the 'inner space' between components and cure to form a strong precision assembly. Formulated in a wide range of viscosities, gap fill flexibility and strength characteristics.

- Increased assembly and product reliability
- Fills all voids and ensures 100% contact
- Seals against corrosion • Controlled strengths

### Anaerobic Adhesives

Ultraloc XS range liquid thread sealants seal and secure metal pipes and fittings. Fills the space between threaded metal parts and cures to prevent leakage. Designed for low and high pressure applications.

- Complete Sealing • Locks and seals in any position
- Does not block pipe system • Instant low pressure seal
- Easy application and disassembly

### Instant Adhesives

Joining materials with adhesives offers significant benefits over mechanical methods of uniting two materials.

- Convenient repairs in seconds • High shear and peel strength
- No mixing • Bonds to a wide variety of materials
- Extensive range available

### RTV's

Ultraloc epoxies offer convenient solutions for a wide range of bonding applications. Our adhesives are versatile and easy-to-use. From general purpose to material specific epoxy, Ultraloc offers a formulation that will work in any environment.

### Epoxies

Can eliminate or significantly reduce costly mechanical fastening methods, ideal for quick repairs, excellent resistance too severe environmental conditions, fills large gaps between parts.





## FAQS

### What is threadlocker?

A threadlocker is an adhesive for nuts, bolts, and screws to lock them in place and avoid loosening caused by stress and vibration. They replace traditional mechanical washers and fasteners.

They are anaerobically curing chemicals that form a strong film in the gaps between the thread of the connection, locking it in place. Threadlockers are available in different versions with different curing times, maximum strength, and temperature ranges.

Read our Ultraloc threadlocker colour explanation chart to learn more about Ultraloc products. Anaerobic adhesives or threadlockers or retaining compounds, are one-part adhesives that cure on active metal surfaces in the absence of oxygen in the bond line.

### Common applications

A wide range of industrial and residential applications use threadlockers. Some applications include:

- Industrial manufacturing
- Mining
- Automotive & transport
- Agricultural

### Is threadlocker permanent?

Red or green threadlocker (high strength) are often called permanent threadlocker for their high adhesive strength.

### Threadlocker properties

They should exhibit the following properties:

- Faster cure speed at room temperature.
- Chemical compatibility with acids, alkalis, and solvents.
- Vibration resistance
- Good consistency for even application.

### How do you apply threadlocker?

The following steps are involved when applying a threadlocker:

- Make sure the surface is clean, dry, and free of grease.
- Choose the correct threadlocker type according to the application.
- Apply the threadlocker evenly throughout the thread surface.
- Assemble the fastener and leave for curing.

### Removing threadlocker?

The following steps are involved in removing the threadlocker:

- Heat the fastener for a couple of minutes.
- Use a hand or wrench to remove the bolt.
- If applying a new threadlocker, clean the bolt and apply the new threadlocker to the threads and reinstall.

### Selection guide

Consider the following criteria when selecting a threadlocker for your application:

- **Media:** The media coming in contact with the threadlocker should be chemically compatible.
- **Curing speed:** The full curing time of the threadlocker usually takes about 24 to 36 hours, whereas the handling cure time can be 1.5 to 30 minutes depending on the type and strength of the threadlocker.
- **Temperature:** Temperature can affect the performance of the threadlocker. High-temperature threadlockers are available to use for high-temperature applications.
- **Torque:** There are low, medium, and high strength threadlocker available depending upon the use. Use a medium strength threadlocker if it may need to be disassembled in the future. High strength threadlockers are suitable for applications that do not require breaking the seal in the future.
- **Low-strength:** Can be disassembled with force.
- **Medium-strength:** Can be disassembled with high force.
- **High-strength:** Are considered permanently locked and can only be removed using specialized chemicals.

### Is threadlocker glue?

The threadlocker can be used as a glue. However, the adhesive bond may differ for different types of threadlockers. blue, green, red, purple, yellow colour-coded threadlockers are available, with each having different adhesive strength.



# CROSS-REFERENCE CHART



ULTRALOC PART NO.	TYPE	COLOUR	STRENGTH	FEATURES	SIZE
<b>3222</b>	Threadlocker	Purple	Low	Easy Disassembly / Small screws	10ml, 50ml, 250ml
<b>3242</b>	Threadlocker	Blue	Medium	High Viscosity	10ml, 50ml, 250ml
<b>3243</b>	Threadlocker	Blue	Medium	Oil Resistant	10ml, 50ml, 250ml
<b>3262</b>	Primerless Threadlocker	Red	High	Permanent Grade	10ml, 50ml, 250ml
<b>3271</b>	Threadlocker	Red	High	Permanent Grade	10ml, 50ml, 250ml
<b>3272</b>	Threadlocker	Red	High	High Temp & High Strength	10ml, 50ml, 250ml
<b>3277</b>	Threadlocker	Red	High	Oil Resistant & Permanent	10ml, 50ml, 250ml
<b>3290</b>	Retaining Compound	Green	Medium	Wicking Grade	10ml, 50ml, 250ml
<b>3294</b>	Retaining Compound	Green	Medium	Wicking Grade & High Temp	10ml, 50ml, 250ml
<b>3440</b>	Threadlocker	Blue	Medium	Primerless & Fast Curing	10ml, 50ml, 250ml
<b>3760</b>	Primerless Threadlocker	Red	High	Primerless	10ml, 50ml, 250ml
<b>3542</b>	Hydraulic & Pneumatic Sealant	Brown	Medium	Fine Threads	10ml, 50ml, 250ml
<b>3545</b>	Hydraulic & Pneumatic Sealant	Purple	Medium	Fast Curing & High Viscosity	10ml, 50ml, 250ml
<b>3565</b>	Pipe Sealant	White	Low / Medium	Contains Teflon	10ml, 50ml, 250ml
<b>3569</b>	Hydraulic & Pneumatic Sealant	Brown	Medium	Medium Viscosity	10ml, 50ml, 250ml

<b>XS10</b>	Liquid Gasket	Red	Rigid	High solvent & chemical resistance	60gm, 300gm
<b>XS15</b>	Liquid Gasket	Purple	Flexible	Easily applied, use on steel	60gm, 300gm
<b>XS18</b>	Flange Sealant	Red	Rigid	High solvent & chemical resistance	60gm, 300gm
<b>XS67</b>	Pipe Sealant	White	Low / Medium	Contains Teflon	60gm, 250gm
<b>XS77</b>	Pipe Sealant	Yellow	Medium / High	Contains Teflon	60gm, 250gm
<b>3401</b>	Instant Adhesive	Clear	Instant	General Purpose	20ml, 500ml
<b>3406</b>	Instant Adhesive	Clear	Instant	Bonds Most Plastics	20ml
<b>3424</b>	Instant Adhesive	Clear	Instant	Fast Cure	20ml, 500ml
<b>3454</b>	Instant Adhesive Gel	Clear	Instant	Gel	20ml
<b>3480</b>	Instant Adhesive	Black	Instant	High Peel Strength	20ml
<b>3609</b>	Retaining Compound	Green	High	Shear strength of 3000psi	10ml, 50ml, 250ml
<b>3620</b>	Retaining Compound	Green	High	High strength, Temp & Viscosity	10ml, 50ml, 250ml
<b>3641</b>	Retaining Compound	Yellow	Medium	Allows disassembly	10ml, 50ml, 250ml
<b>3660</b>	Retaining Compound	Silver	High	Fast Curing, Repairs worn parts	60gm
<b>3680</b>	Retaining Compound	Green	High	Fast Cure	10ml, 50ml, 250ml
<b>ACT01</b>	Activator	Clear	Activator	Acetone	50ml
<b>ACT02</b>	Activator	Clear	Activator	Heptone	50ml
<b>ACT04</b>	Activator	Amber	Activator	Solvent	50ml





## 3222 Compound

- Small fasteners under 6mm
- PURPLE
- Low
- 20 min / 24 hrs
- -50c to + 150c
- High
- Easy Disassembly / Small screws

Anaerobic low strength removable grade threadlocking compound for small metal screws, nuts & fasteners less than 6mm in diameter.

- 10ml bottle - 322210
- 50ml bottle - 322250
- 250ml bottle - 322225



## 3242 Compound

- Fasteners 6mm to 20mm
- BLUE
- Medium
- 10 min / 24 hrs
- -50c to + 150c
- High
- High Viscosity

Anaerobic medium strength removable grade threadlocking compound for metal screws, nuts & fasteners between 6mm and 20mm in diameter.

- 10ml bottle - 324210
- 50ml bottle - 324250
- 250ml bottle - 324225



## 3243 Compound

- Fasteners 6mm to 20mm
- BLUE
- Medium
- 10 min / 24 hrs
- -50c to + 150c
- High
- Oil Resistant

Anaerobic medium strength, oil resistant removable grade threadlocking compound for metal screws, nuts & fasteners between 6mm and 20mm in diameter.

- 10ml bottle - 324310
- 50ml bottle - 324350
- 250ml bottle - 324325



## 3262 Compound

- Fasteners up to 20mm
- RED
- High
- 20 min / 24 hrs
- -50c to + 150c
- High
- Permanent Grade

Anaerobic high strength permanent grade threadlocking compound for metal screws, nuts & fasteners up to 20mm in diameter.

- 10ml bottle - 326210
- 50ml bottle - 326250
- 250ml bottle - 326225



## 3271 Compound

- Fasteners up to 25mm
- RED
- High
- 10 min / 24 hrs
- -50c to + 150c
- Medium
- Permanent Grade

Anaerobic high strength & medium viscosity permanent grade threadlocking compound for metal screws, nuts & fasteners up to 25mm in diameter.

- 10ml bottle - 327110
- 50ml bottle - 327150
- 250ml bottle - 327125



## 3272 Compound

- Fasteners up to 25mm
- RED
- High
- 30 min / 24 hrs
- -50c to + 230c
- High
- High Temp & High Strength

Anaerobic high strength & high temp threadlocking compound for metal screws, nuts & fasteners up to 25mm in diameter.

- 10ml bottle - 327210
- 50ml bottle - 327250
- 250ml bottle - 327225

KEY: ● Type ○ Colour ● Strength ● Fixture Time / Full Cure ● Temperature Range ● Viscosity ● Unique Features ● Size & Part Number



## 3277 Compound

- Fasteners over 25mm
- RED
- High
- 30 min / 24hrs
- -50c to + 150c
- High
- Oil Resistant & Permanent

Anaerobic high strength & oil resistant threadlocking compound for metal screws, nuts & fasteners over 25mm in diameter

- 10ml - 327710
- 50ml - 327750
- 250ml - 327725



## 3290 Compound

- Fasteners up to 12mm
- GREEN
- Medium
- 20 min / 24 hrs
- -50c to + 150c
- Low
- Wicking Grade

Anaerobic wicking (penetrating) grade threadlock compound for sealing porous welds & castings. Penetrating action allows 3290 to wick through thread paths & porous surfaces.

- 10ml - 329010
- 50ml - 329050
- 250ml - 329025



## 3294 Compound

- Fasteners up to 12mm
- GREEN
- Medium
- 10 min / 24 hrs
- -50c to + 150c
- High
- Wicking Grade & High Temp

Anaerobic wicking (penetrating) grade, high temp threadlock compound for sealing porous welds & castings. Penetrating action allows 3294 to wick through thread paths & porous surfaces.

- 10ml - 329410
- 50ml - 329450
- 250ml - 329425



## 3440 Primerless

- Fasteners up to 25mm
- BLUE
- Medium
- 4 min / 24 hrs
- -50c to + 150c
- Medium
- Primerless & Fast Curing

Primerless medium strength fast curing threadlocker. Suitable for use on motor mounting bolts, rocker nuts and other applications that require disassembly with hand tools.

- 10ml bottle - 344010
- 50ml bottle - 344050



## 3760 Primerless

- Up to 25mm
- RED
- High
- 4 min / 24 hrs
- -50 to + 150
- High
- Primerless

Primerless high strength fast curing threadlocker. Suitable for use on bolts in transmissions, construction equipment and other heavy duty applications.

- 10ml bottle - 376010
- 50ml bottle - 376050

KEY: ● Type ○ Colour ● Strength ● Fixture Time / Full Cure ● Temperature Range ● Viscosity ● Unique Features ● Size & Part Number



## 3609 Compound

- Close Fitting Parts
- GREEN
- High
- 30 min / 24 hrs
- -55c to 150c
- Low
- Shear strength of 3000psi

Anaerobic low viscosity, high strength retaining compound that bonds rigid assemblies.  
Shear strength of 3000psi after 24hr cure time.

- 10ml bottle - 360910
- 50ml bottle - 360950
- 250ml bottle - 360925



## 3620 Compound

- Up to .010"
- GREEN
- High
- 30 min / 24 hrs
- -55c to 200c
- High
- High strength, Temp & Viscosity

Anaerobic fast curing, high temp, resistant retaining compound with high shear strength. Suitable for cylindrical fitting parts.  
Bonds gaps up to .010".

- 10ml bottle - 362010
- 50ml bottle - 362050
- 250ml bottle - 362025



## 3641 Compound

- Up to .020"
- YELLOW
- Medium
- 30 min / 24 hrs
- -55c to 150c
- Medium
- Allows disassembly

Fast curing, controlled strength retaining compound that allows disassembly. 1800psi shear strength after 24hr cure. Ideal for cylindrical parts that require disassembly.  
Fills gaps up to .020".

- 10ml bottle - 364110
- 50ml bottle - 364150



## 3660 Compound

- 0.50"
- SILVER
- High
- 10 min / 24 hrs
- -55 to 150c
- Paste
- Fast Curing, Repairs worn parts

High strength, fast curing, anaerobic retaining compound. Paste like consistency. Ideal for repairing keyways and worn machinery parts.  
Can fill gaps up to 0.50".

- 50ml tube - 366050



## 3680 Compound

- N/A
- GREEN
- High
- 10 min / 24 hrs
- -55 to 150c
- High
- Fast Cure

High strength, high performance retaining compound for slip fitted parts. Ideal for gap filling up to 0.15". Best resistance to dynamic, axial and radial loads. Recommended for retaining shafts, gears pulleys and similar cylindrical parts.

- 10ml bottle - 368010
- 50ml bottle - 368050
- 250ml bottle - 368025

KEY: ● Type ○ Colour ● Strength ● Fixture Time / Full Cure ● Temperature Range ● Viscosity ● Unique Features ● Size & Part Number





## 3401 General Purpose

- Surface Insensitive Ethyl
- CLEAR
- Medium
- 15 sec / 24 hrs
- -50c to + 80c
- Medium
- General Purpose

Surface insensitive ethyl type A, medium viscosity general instant adhesive (cyanoacrylate). Used for bonding porous materials and plastics, will bond wood, leather, fabric, ceramic and paper.

● 20g bottle - 340120



## 3406 Rubber & Plastic

- Surface Insensitive Ethyl
- CLEAR
- High
- 15 sec / 24 hrs
- -50c to + 80c
- Low
- Bonds Most Plastics

Instant adhesive (cyanoacrylate) surface insensitive ethyl type A low viscosity elastomer and plastic bonder. Very fast cure for bonding most types of plastics and rubber, including Viton & EPDM. O ring joiner. Bonds rubber to rubber and rubber to metal.

● 20g bottle - 340620



## 3424 Fast Cure

- Surface Ethyl cyanoacrylate
- CLEAR
- Medium
- 2-10 sec / 24 hrs
- 55c to + 90c
- Medium
- Fast Cure

General purpose fast curing ethyl cyanoacrylate (instant adhesive). Ideal for difficult to bond materials such as rubber O-rings and rubber seals. Suitable for most plastics, elastomers and rubbers. Temp range -55c to + 90c

● 20g - 342420  
● 500ml - 3424500



## 3454 Non-Drip Gel

- Surface Insensitive Ethyl
- CLEAR
- High
- 15 sec / 24 hrs
- -50c to + 80c
- Gel
- Gel

Instant adhesive Gel. Non-sagging, Non-running Gel, which makes it suitable for vertical applications. Allows 0.020" gap fill.

● 20g tube - 345420



## 3480 Rubber Toughened

- Toughened Ethyl
- BLACK
- High
- 15 sec to / 24 hrs
- -50c to + 100c
- Medium
- High Peel Strength

Black rubber toughened instant adhesive. Used when high peel & impact resistance is required. Suitable for applications involving movement or vibration in the finished item. Typical applications may be power tools, white goods and heavy industrial applications.

● 20g - 348020

KEY: ● Type ○ Colour ● Strength ● Fixture Time / Full Cure ● Temperature Range ● Viscosity ● Unique Features ● Size & Part Number



## XS10 Liquid Gasket

- Less than 0.5mm
- Rigid (metal to metal)
- -55c to 200c
- High solvent & chemical resistance
- Formed in place
- 2 hrs
- Excellent
- Yes

A red, single component anaerobic sealant. Easily applied, XS10 cures in the absence of air and forms a tough rigid gasket with excellent solvent & chemical resistance. The low pressure seal will not shrink or crack. Temp range of -55c to 200c.

- 60g tube - **XS1001**
- 300ml cart - **XS1002**



## XS15 Gasket Sealant

- Less than 0.5mm
- Flexible (metal to metal)
- -55c to 150c
- Easily applied, use on steel
- Formed in place
- 30 min
- Excellent
- Yes

A purple, single component anaerobic sealant. Easily applied. XS15 cures between the parts to form in place a tough flexible gasket giving an instant low pressure seal. Will not shrink, relax or crack. Temp range -55c to 150c.

- 60g tube - **XS1502**
- 300ml cart - **XS1503**



## XS18 Flange Sealant

- Less than 0.5mm
- Rigid (metal to metal)
- -55c to 200c
- High solvent & chemical resistance
- Formed in place
- 2 hrs
- Excellent
- Yes

A red, single component anaerobic sealant. Easily applied, XS18 cures between the parts, this forms a tough, flexible gasket, giving an instant low - pressure seal will not shrink, relax or crack. Temperature range -55c to 150c.

- 60g tube - **XS1802**
- 300ml cart - **XS1803**

**KEY:** ● Gap Size ● Flange Type ● Temperature Range ● Unique Features ● Gasket Type ● Low Pressure Seal ● Oil Resistance ● Sensor Safe ● Size & Part Number



## XS67 Pipe Sealant - Teflon

- Metal
- White Paste
- -55c to 180c
- Contains Teflon
- 76mm (3")
- Yes
- Low / Medium

A white anaerobic pipe sealant containing Teflon. Seals instantly and is resistant to most chemicals. Suitable for use on mild steel, aluminium, copper and brass. Removable with hand tools and prevents vibration loosening. Temp -55c to 180c. Recommended for all coarse threads where slow cure is required to prolong time frame for adjusting valves & fitting.

- 60ml tube - **XS6701**
- 250ml tube - **XS6702**



## 3565 Pipe Sealant - High Pressure

- Metal
- White Paste
- -55c to 180c
- Contains Teflon
- 76mm (3")
- Yes
- Low / Medium

A controlled strength, high performance thread sealant containing Teflon designed for the locking and sealing of metal threaded pipes & fittings. Certified to ANSI/ NSF Standard 61 for use in commercial and residential potable water systems not exceeding 80c. Suitable to seal water, petrols, oils, hydrocarbons and other chemicals.

- 50ml - **356550**
- 250ml tube - **356525**



## XS77 Pipe Sealant - High Pressure

- Metal
- Yellow Paste
- -55c to 180c
- Contains Teflon
- 76mm (3")
- Yes
- Medium / High

A high - pressure anaerobic pipe sealant, seals instantly and is resistant to most chemicals. Suitable for use on mild steel, stainless steel, aluminium, copper and brass. Removable with hand tools and prevents vibration loosening. Temperature range -55c to 180c.

- 60ml tube - **XS7701**
- 250ml tube - **XS7702**

**KEY:** ● Pipe Threads ● Description ● Temperature Range ● Unique Features ● Max Thread ● Instant Low Pressure Seal ● Disassembly Strength ● Size & Part Number



## 3542

Hydraulic & Pneumatic Sealant

- Metal
- Brown
- -55c to 150c
- Fine Threads
- 25mm
- Medium Viscosity
- Low / Medium

Fast cure medium strength thread sealant suitable for use with fine threads in hydraulic & pneumatic installations and connections which are up to 25mm in diameter.

● 10ml bottle - 354210



## 3545

Hydraulic & Pneumatic Sealant

- Metal
- Purple
- -55c to 150c
- Fast Curing & High Viscosity
- Fine up to 20mm
- High
- Low / Medium

Anaerobic high viscosity, fast curing hydraulic sealant. Ideal for locking and sealing hydraulic & pneumatic pipes and fittings.

Seals operating pressures to 10,000 psi.

- 10ml bottle - 354510
- 50ml bottle - 354550
- 250ml bottle - 354525



## 3569

Hydraulic & Pneumatic Sealant

- Metal
- Brown
- -55c to 150c
- Medium Viscosity
- 20mm
- Medium Viscosity
- Low / Medium

Anaerobic hydraulic sealant specifically designed for locking and sealing of hydraulic & pneumatic parts, metal pipes and fittings.

Seals operating pressures to 10,000 psi.

- 10ml bottle - 356910
- 50ml bottle - 356950
- 250ml bottle - 356925

KEY: ● Pipe Threads ● Description ● Temperature Range ● Unique Features ● Max Thread ● Instant Low Pressure Seal ● Disassembly Strength ● Size & Part Number



- U200 - XS Grey
- U201 - XS Blue
- U202 - XS Black
- U203 - XS Red
- U204 - XS Clear

## Premium RTV Silicone

Ultraloc Premium RTV Silicone is a third-generation top grade room temperature vulcanized silicone sealant. It is a natural, non – corrosive and eco-friendly sealant. LOW VOLATILE FORMULA. It is rapid prototyping to seal surfaces solid, it possesses anti-acid and anti-alkali. Oil resistance is much better than regular rubber sealants in achieving the effect of solid sealant caulk permanence.

Application: Used in high strength structural sealing. Static sealing for engines, cover plates, oil pans, high pressure resistance & high temp resistance flanges, value bushes for the automotive industry. It can also be used in the plant sealing of electric, chemical & mechanical equipment.





## SY-150 5min Quick Set Epoxy

Convenient easy to use dual syringe epoxy.  
Permanently bonds a variety of materials in 4-6 minutes.  
• Perfect for Bonding: Metal, China, Glass and Plastic  
• Strength 1200 psi



## SY-5145 5min Metal Epoxy

Industrial strength fast setting metal epoxy.  
4-6 minutes positioning time and can be handled in 30 minutes.  
Can be drilled tapped, sanded and filed after full cure.  
• Works Best on: Stainless Steel, Copper, Steel and Aluminum  
• Strength 2500 psi



## ACT01

- Activator
- Acetone

An acetone based solvent for use as a surface cleaner and activator prior to the application of adhesive. Also used for removing adhesive and cleaning applicator equipment.

● 100ml - ACT01



## ACT02

- Activator
- Heptane

A heptane based solvent activator designed to cure excess adhesive outside the bondline. Can be applied during or after assembly to increase cure speeds and the gap filling properties of cyanoacrylate adhesives.

● 100ml - ACT02



## ACT03

- Primer
- Polyolefin

A single component solvent based polyolefin primer. Increases bond speed and strength of Ultraloc cyanoacrylates when used on low energy plastics such as polyethylene, polypropylene & silicone rubber.

● 100ml - ACT03



## ACT04

- Activator
- Solvent

Solvent based activator primer specially formulated to accelerate the curing of Ultraloc's anaerobic adhesive range. On part life of up to 7 days.

● 100ml - ACT04



## ACT05

- Activator
- Solvent

Solvent based activator primer specially formulated to accelerate the curing of Ultraloc's anaerobic adhesive range. On part life of up to 30 days

● 100ml - ACT05

KEY: ● Description ● Base ● Size & Part Number

Originally developed in the USA for the military, Next Generation SUPATAPE is a self bonding wrap made from a special high-quality silicone rubber compound which adheres to itself when wrapped under tension. SUPATAPE forms a non-conductive, air and water tight insulating seal.

### SUPATAPE:

Resists Fuels, Oils, Acids, Solvents, Salt Water, Road Salt and UV Rays.


- Self-Fusing Insulator
- Permanent Air-Tight Moisture Proof Seal
- Temp Range -50c to +260c
- Insulates 8000 Volts (per unstretched layer)
- Tensile Strength of 700 psi



3 mtr x 2.5cm - M500

3 mtr x 3.8cm - M520

## Directions for using SUPATAPE:

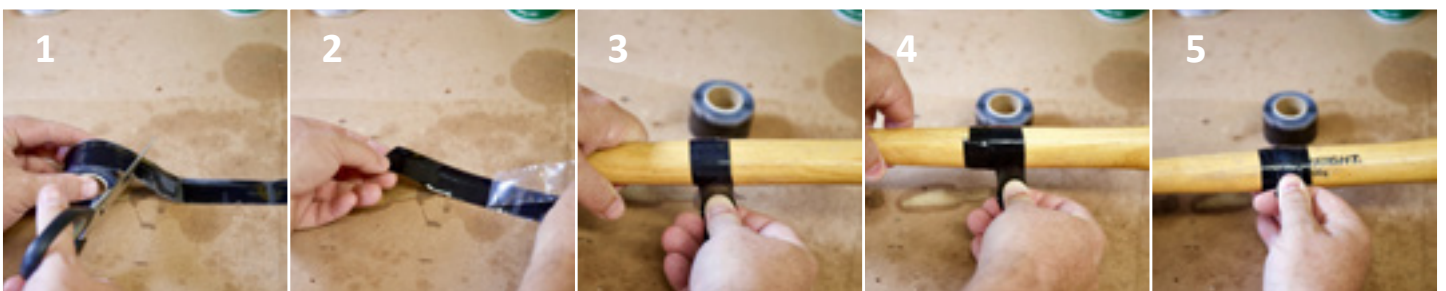

1  
Clean surface being wrapped - Cut tape to desired length

2  
Peel back a short length of the protective film, keep tape clean & dry

3  
Begin with one complete overlap of the tape onto itself

4  
Stretch while continuing to wrap object with "half laps" remove clear protective film as you go

5  
End of tape at final layer should be completely positioned onto itself

**Note:** The SUPATAPE bond begins to cure immediately upon contact with itself. Repositioning or removal is not recommended after 2 minutes of wrapping. SUPATAPE will form a permanent, cohesive bind within 24 hours at room temperature. Store in a cool dry place.

# ORIGINAL SUPERGLUE / PRO SEAL



## SY-IN



Convenient, easy to use dual syringe epoxy. Permanently bonds a variety of materials in 90 SECONDS. No measuring required. Resists water, gasoline and shop solvents.

1oz card - SY-IN

## SY-QS



Convenient easy to use dual syringe epoxy. Permanently bonds a variety of materials in 4-6 minutes. No measuring required. Resists water, gasoline, and shop solvents.

1oz card - SY-QS

## SY-SS



Convenient easy to use dual syringe extra strong epoxy. 30 minutes setting time. No measuring required. Resists water, gasoline and shop solvents. Fully cures in seven hours.

1oz card - SY-SS

## 15212



Industrial strength fast setting metal epoxy. 4-6 mins positioning time, can be handled in 30 minutes. Can be drilled, tapped or filed after full cure.

1oz card - 15212

## 15213



Industrial strength fast setting gel epoxy. 4-6 mins positioning time, can be handled after 60 minutes. Automatically dispenses equal parts with one push.

1oz card - 15213

## 15277



Methacrylic based Industrial Strength product dispenses resin and hardener automatically into equal parts with one push. Works well on plastic toys, fixtures made of plastic, metal, concrete and many other materials. Cures to an opaque light yellow colour.

1oz card - 15277

# PRO SEAL

Few adhesives are as effective or as useful as Pro Seal Automotive Products. Car repair is a necessary evil for most of us, but sometimes simple repairs can run into the hundreds if not thousands of dollars. Many expensive repair bills can be avoided with the versatile line of Pro Seal Automotive Products which includes gasket makers. Pro Seal Automotive Products are designed to withstand the extremes common to every car engine. Heat, friction, vibration and (Cont'd next page ...)

## 50102



New formula Future Glue bonds more surfaces than ever before. Now bonds porous or contaminated surfaces. For bonding and repairing most automotive metals, plastics, trim & fabric.

2g tube - 50102

## 50105



New formula Future Glue Gel bonds more surfaces than ever before. Now bonds porous or contaminated surfaces. For bonding and repairing most automotive metals, plastics, trim & fabric.

2g tube - 50105



compression conspire against many other adhesives, but Pro Seal holds strong and fast even under these adverse conditions. You never need to worry about your car when you use premium Pro Seal products. Choose Pro Seal Automotive Products to meet all of your auto repair and maintenance needs. Do not trust no-name competitors with one of your most valued and valuable possessions. Accept no imitations; ask for Pro Seal Automotive products by name!

## 64600



Cold Weld compound eliminates welding and brazing. Can be tapped, drilled, machined, sanded or filed. Sets in 15 minutes, full cure at 12 hours. Resistant to petrol, diesel, oil, hyd oil, water and anti-freeze.

2 x 28g tubes - 64600

## 64605



Quick Cold Weld is a quick set epoxy steel which fully cures in 4 minutes. Resists temperatures up to 150°C. Can be drilled, tapped, machined, filed or sanded. Resistant to petrol, diesel, oil, hyd oil, water and anti-freeze.

2 x 28g tubes - 64605

## U100

### Premium RTV Silicone Gasket Maker - Silver



The high temp gasket maker is a high-grade silicone sealant, neutral and environmentally friendly, has pure silver texture, good temperature resistance, and insulation properties, and can be quickly formed of silicone rubber.

71g tube - U100

Colour: Silver

## U101

### Super RTV Silicone Gasket Maker - Blue



This blue silicone gasket maker is the third generation of high-grade room temperature vulcanized silicone sealant, neutral, non-corrosive, environmental protection, rapid moulding of high-performance silicone rubber gasket, make the sealing surface firmly combined.

85g tube - U101

Colour: Blue

## U102

### Super RTV Silicone Gasket Maker - Black



This black gasket maker is the third generation of high-grade room temperature vulcanized silicone sealant, neutral, non-corrosive, and environmentally friendly. The high-performance silicone rubber that can be quickly formed can firmly bond the bonding surface, corrosion resistance & high-temp resistance.

71g tube - U102

Colour: Black

## U103

### High-grade RTV Silicone Gasket Maker - Red



SANVO red RTV gasket maker is a fast-curing, sensor-safe, low-odor, non-corrosive formula, which is specially developed for high-strength requirements, heavy-duty vehicles, and high-temperature equipment. Its temperature resistance range is -60°C to 300°C, and the pressure can be greater than or equal to 15MPa.

93g tube - U103

Colour: Red

## U105

### Premium RTV Silicone Gasket Maker - Gold



This product is a high-grade room temperature vulcanized silicone sealant, added with special reinforcing metal (Cu), neutral and non-corrosive, fragrant and environmentally friendly, pure gold texture, good temperature resistance and insulation performance.

71g tube - U105

Colour: Gold



**WESTATE HOSE SUPPLIES**  
A.B.N. 36 073 957 617  
[www.westatehose.com.au](http://www.westatehose.com.au)

**WELSHPOOL**  
Phone: (08) 6163 3626  
Email: [sales@westatehose.com.au](mailto:sales@westatehose.com.au)

**O'Connor**  
Phone: (08) 9314 1833  
Email: [oconnor@westatehose.com.au](mailto:oconnor@westatehose.com.au)

INDUSTRIAL HOSES AND FITTINGS

# MOLYTEC

**Molytec is a family owned, Australian based company which was established in 1986 as a manufacturer and supplier of lubricants and chemicals to the industrial, transport, mining, steel and hardware industries.**

**Our company-owned brands are:**

**Molytec** - performance lubricants and chemicals

**Cobra Cote** - the perfect surface protector

**DCM** - combat coatings for the steel industry

**Nickeltec & Copatec** - industrial grade nickel & copper anti-seize

**Fleece Grease** - a unique blend of lanolin-based products

**Ultraloc** - industrial anaerobic threadlockers, sealants, retaining compounds and cyanoacrylate adhesives

**Supatape** - self-fusing silicone wrap

Molytec Australia is also a distributor of Moly Slip metal working lubricants, Proseal instant gasket makers, and The Original Superglue Corp range of epoxies.

We offer a vast range of products which include anti-seize compounds, silicone lubricants, specialty greases, zinc gal coatings, metal working lubricants, chain and cable lubes, electrical component and contact cleaners, penetrating and releasing fluids, molybdenum disulphide based products, food grade anti-seize, red rubber grease, RTV silicones, threadlockers, retaining compounds, and pipe and flange sealants.

At Molytec our aim is to build lasting and prosperous associations with our customers by providing a high quality range of products. Backed up by our professional and dedicated team of sales staff based in Brisbane, Sydney and Melbourne, we are totally committed to providing the best possible service for our customers and their clients, Australia wide.

Contact one of our distributors or one of our offices for a complete list of our products, or visit our website: [www.molytec.com.au](http://www.molytec.com.au)

Australian Leader in Industrial and Automotive Lubricants Since 1986