


CAMLOCKS

Camlocks also called cam and groove coupling, are a fitting used to rapidly connect and disconnect fitting on piping or hose, they come in a variety of materials to be used with different media and a variety of sizes to accommodate hose or piping diameter. Camlocks are capable of carrying liquids, powders and granules and are interchangeable with all other cam and groove couplings made to the same standard, ensuring compatibility with couplings made to the same specification. Camlocks should not be used in steam or compressed air applications. Available in Aluminium, Stainless Steel, Polypropylene, Nyglass and Brass. 250 PSI for 1/2" to 2", 150 PSI for 2 1/2" to 4", 75 PSI for 5" & 6".

WAL - ALUMINIUM

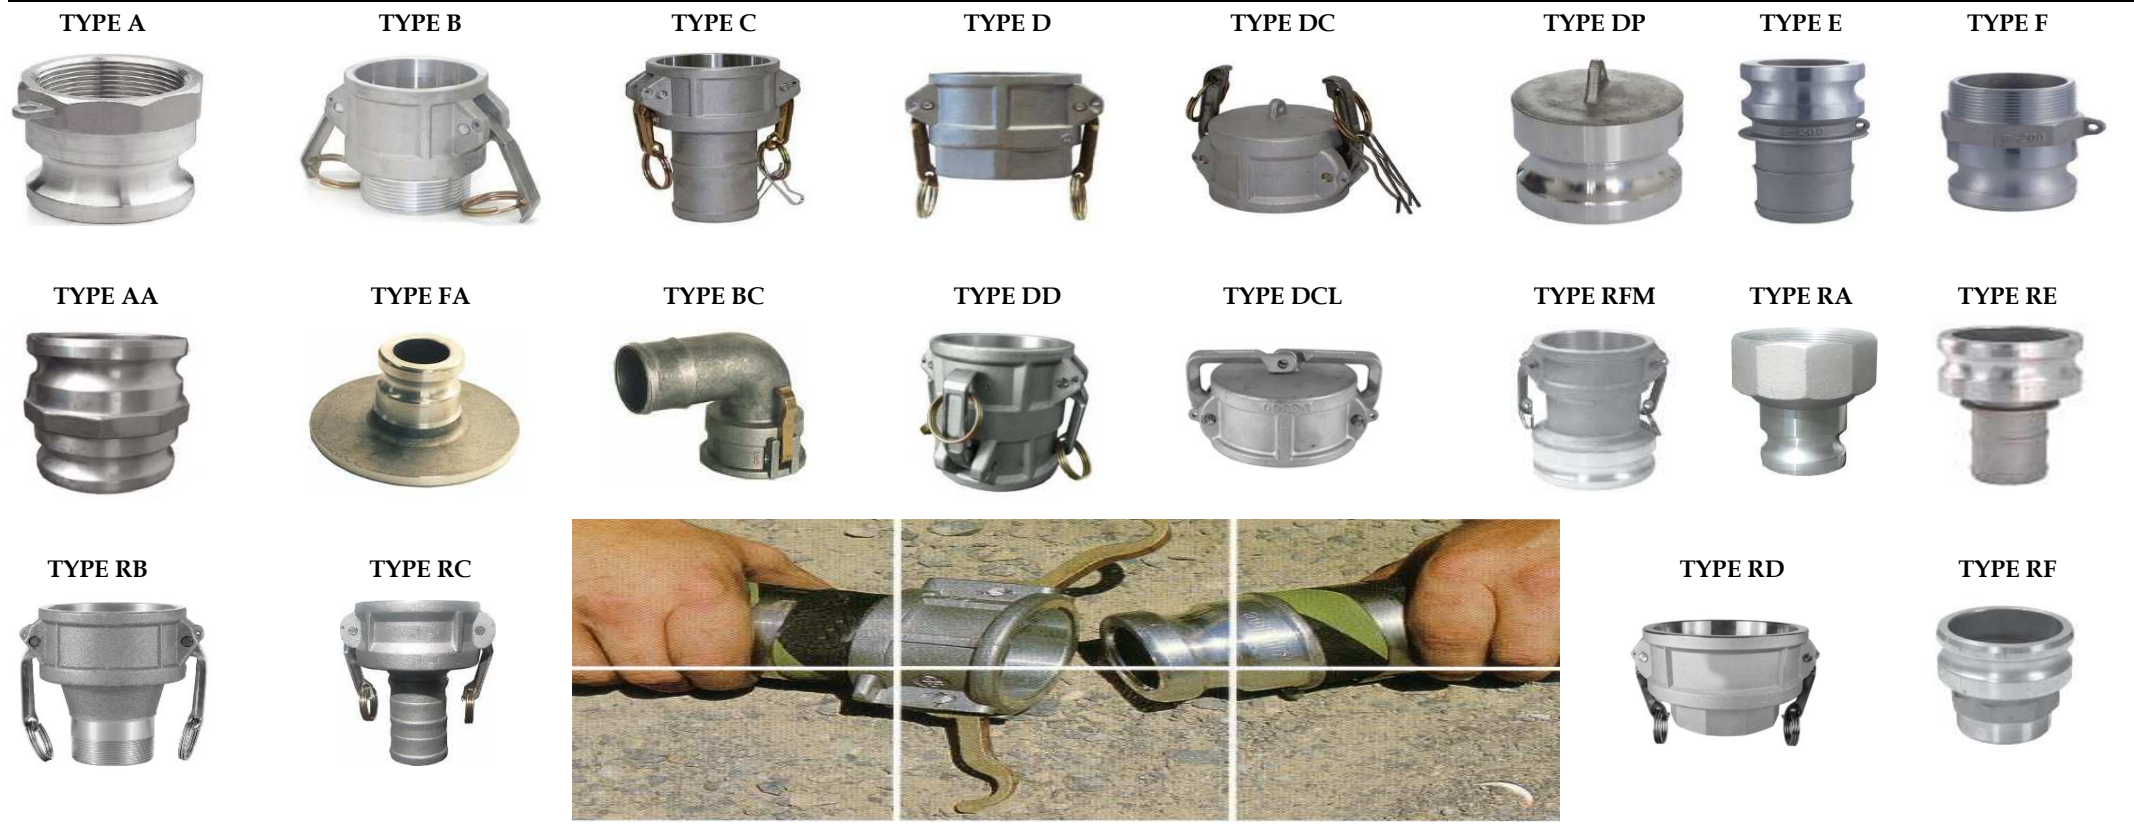

PP - BLACK POLYPROPYLENE



SS - STAINLESS STEEL




NY - YELLOW NYGLASS



BR - BRASS



CAMLOCK ACCESSORIES

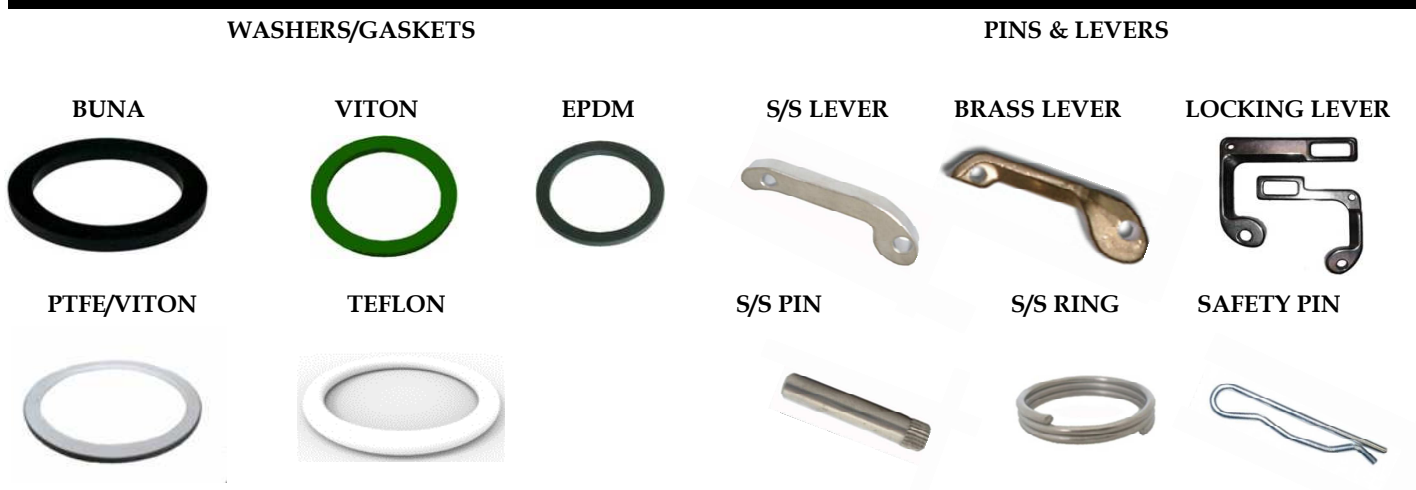

CAMLOCK HOSE ASSEMBLIES

