

# AIRSEEDER & SPRAYING

## SHASB - Clear/Black Heavy Duty Airseeder



Flexible and high level of U.V. resistance makes this an excellent hose for use as primary, secondary and tertiary lines on air seeder machines. Conforms to AS/NZS 2070. 90 PSI. Size 1" to 4" ID

## SHASG - Clear/Green Heavy Duty Airseeder



Flexible and high level of U.V. resistance makes this an excellent hose for use as primary, secondary and tertiary lines on air seeder machines. Conforms to AS/NZS 2070. 90 PSI. Size 1", 1 1/4", 2 1/2" ID

## SHASR - Clear/Red Heavy Duty Airseeder



Flexible and high level of U.V. resistance makes this an excellent hose for use as primary, secondary and tertiary lines on air seeder machines. Conforms to AS/NZS 2070. 90 PSI. Size 1" to 3" ID

## SHHD - Grey HD



A tough, flexible suction & discharge hose designed for the transfer of water, slurries, chemicals, grains, sand and gravel. 58 PSI. Size 1" to 6" ID.

## SHYT - Yellow Tail HD Suction



A heavy duty suction/discharge well suited for extreme environments. High Nitrile/PVC blend ensures excellent for abrasive applications. 43-73 PSI. Size 2" to 4" ID.

## SFWAS - Black Corrugated Airseeder




Lightweight and flexible, corrugated cover and smooth bore, it is an excellent hose for use as primary, secondary and tertiary lines on airseeding machines. Size 1" to 3" ID.

## D830 - MAXFLO Air Seeder Suction



Hardwall hose designed for dry conveyance of seeds on airseeders and other medium duty abrasives and service. 10 bar. Sizes 1 1/4" to 3" ID.

## D850 - MAXFLO Dust Collector

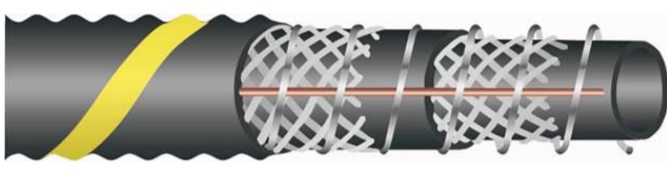

Light material handling and airseeder mandrel built hose with steel wire helix and corrugated cover for flexibility. 10 bar. Sizes 4" to 8" ID.

## D831 - MAXFLO Air Seeder Delivery



Softwall hose designed for dry conveyance of seeds on airseeders and other medium duty abrasives and service. 10 bar. Sizes 1 1/4" ID.

## TGT - Opaque Grain Tube



Lightweight and semi-rigid LDPE opaque seed transfer tubing designed for use as tertiary lines on air seeding equipment. Size 23 to 32mm ID.

## J16 - Vulcano TPR A Ducting



Thermoplastic rubber with steel helix. Light and flexible, resistant to chemicals and abrasion. Temp range: -40 to +125C. Size 1 1/2" to 16" ID.

## J11 - EOLO PU Anti-Static Ducting



Ether based PU wall, food grade, with an anti-shock rigid PVC spiral and copper anti-static wire. Abrasive resistant and flexible. Size 1 1/4" to 12" ID.

## TGTF - Flexends



Flexends are made from a very high wear, high flex, and high UV plastic that reduce the vibration in the header and hose. Size 25mm and 32mm



## TGTFK - Flexfolds



FLEXFOLD is a new high wearing plastic moulded tube to replace the kinks and worn out sections on the primary supply rubber hose on a seeding bar.

## PHSPW - Spraychem Black



High chemical and petroleum resistant hose manufactured from polymer with high nitrile content. Flexible and U.V. resistant. 290 PSI. Sizes 5/16" to 1" ID.

## PHAR - Allrounder Red Spray



High pressure spray hose resistant to a wide range of pesticide and weedicide chemicals used in spraying applications. 450 PSI. Sizes 3/8" to 1" ID.

## PHELP - Eliminator Pro



Eliminator Pro is designed for applications involving the high pressure transference of chemicals involved in horticulture. 600 PSI. 5/16" to 1" ID.

## NITRO & RISA CLIPS



## WORMDRIVE CLAMPS



## SUPER/T-BOLT CLAMPS



## NY - YELLOW NYGLASS CAMLOCKS

### TYPE A



### TYPE B



### TYPE C



### TYPE D



### TYPE DC



### TYPE DP



### TYPE E



### TYPE F

