

DEWATERING AND IRRIGATION

LFLD - Blue Low Pressure Layflat




Ideal for use as a drainage hose in emergency flood disaster situations, locations with relatively small differences in elevation, for temporary water supply or drainage. 30 - 99 PSI. Size 1" to 16" ID.

LFHD - Red High Pressure Layflat



Well suited for water drainage at open pit mining and at civil engineering/dam construction sites in applications where water needs to be moved at significant elevation. 75 - 152 PSI. Size 1 1/2" to 8" ID.

LFDW - Black Extra Heavy Duty Layflat

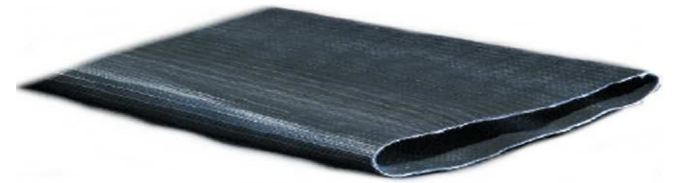

Our most abrasion resistant and high pressure layflat available. It's ruggedness and high tensile strength make it suitable for use in mining, irrigation, and dewatering. 150 PSI. Size 2" to 12"

D220 - MAXFLO Contractors Water Suction



Corrugated flexible hose with cuffed ends for easier insertion of fittings. 3 & 6 metre lengths. 10 bar Sizes 3" to 8" ID.

Hose Assemblies



Specialty hose assemblies can be made to order for most dewatering and irrigation applications.

CAMLOCKS



Camlocks also called cam and groove coupling, a hose coupling used to rapidly connect and disconnect fitting on piping or hose, they come in a variety of materials to be used with different media and a variety of sizes to accommodate hose or piping diameter. Camlocks are capable of carrying liquids, powders and granules and are interchangeable with all other cam and groove couplings made to the same standard, ensuring compatibility with couplings made to the same specification. Size 1/2" to 6". Available in Aluminium, Stainless Steel, Polypropylene, Ntglass and Brass.

Socket & Ball "B" Couplings



Socket & Ball "B" Couplings reduce the operative costs thanks to a quick set up [with up to 30 degree deviation cone] and to a working pressure to 20bar. The Socket & Ball "B" Coupling [Bauer interchangeable] gives complete versatility to different applications like irrigation, road construction, water delivery in mines, suction line, civil projects, bypass lines, dewatering, chemical and food industries. Size 2" to 8".

Steel Hose Couplings and Strainers



Wide and varied range of steel connections where a permanent or semi-permanent coupling is required. From hositail threaded fittings to flanged footvalves and strainers.

SC/SSC - Super Clamp



The Super Clamp or T-Bolt Clamp is a heavy duty hose clamp designed primarily for use in applications where hose clamps must meet stringent requirements.

Wormdrive Clamp



Wormdrive general purpose hose clamps are ideal for hose sealing and use in many different applications with a high mechanical load.

Centre-Punch Clamp & Strapping



Centre-Punch clamps and Strapping are used where a permanent clamping arrangement is required. With the versatility of tailor-made lengths for applications.

Butterfly Valves



The wafer style is designed for inline service and relies on a flange either side of the valve to secure it in the pipeline. Size 2" to 12".

Ballvalves



Used in many applications, ball valves are capable of throttling fluids and gases and are especially useful for low-flow situations. Available in Brass, Stainless & PVC.

Valves



Assortment of different valves for dewatering and irrigation applications. Available in Brass and Stainless steel.